

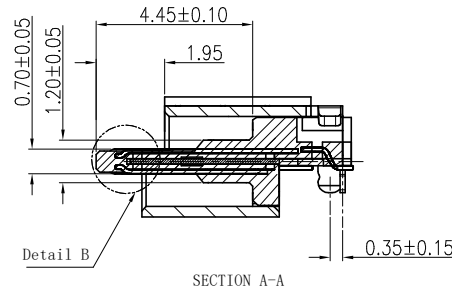
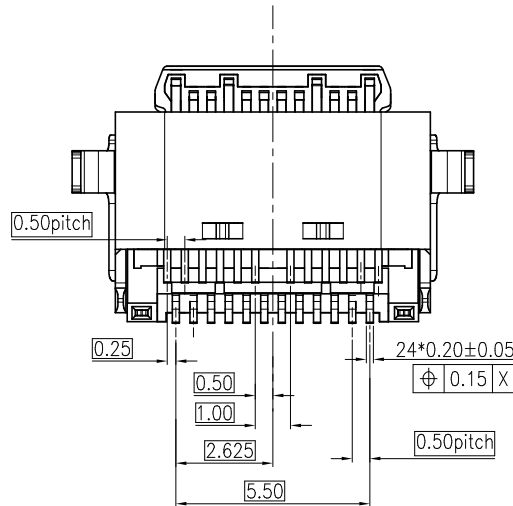
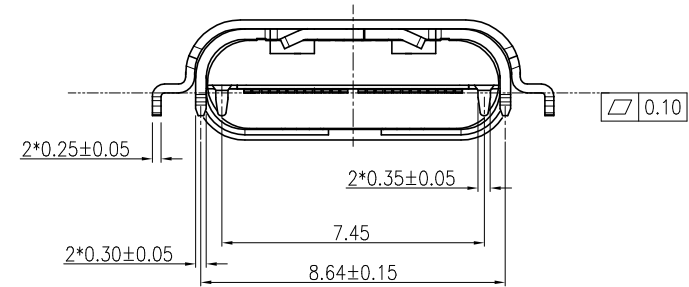
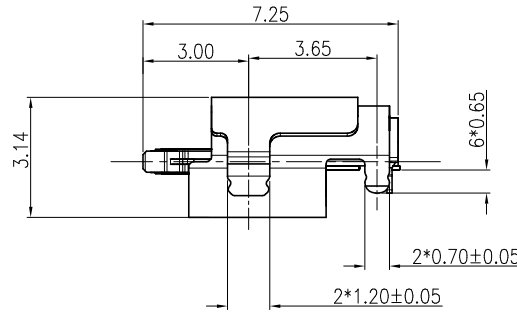
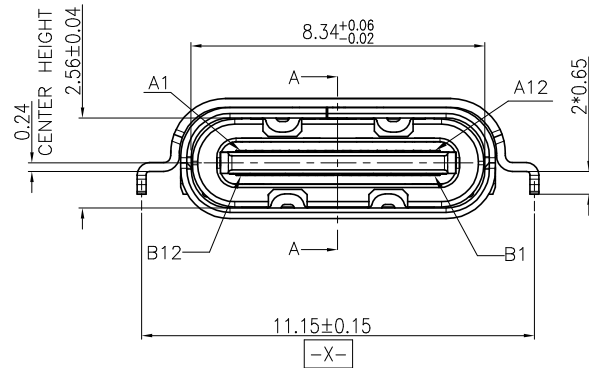
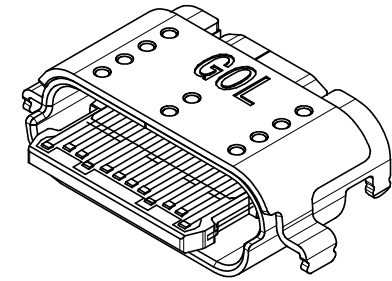
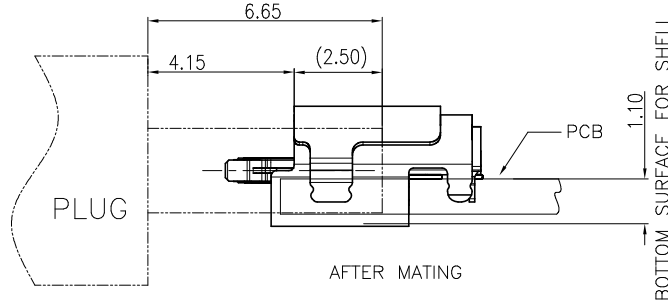


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A	---	FIRST VERSION	07/20'20

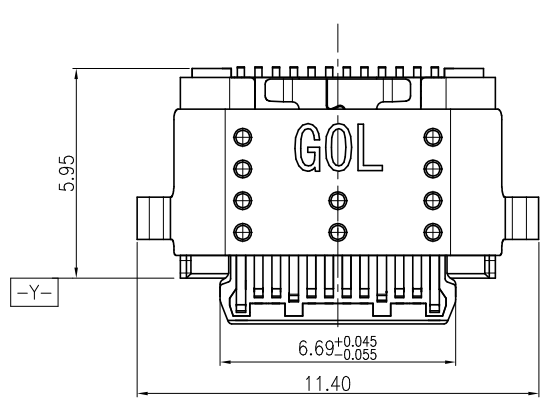

⑦	TOP CONTACT	1 SET	C18150-R540	50u" MIN. NI UNDER PLATING.
⑥	BOTTOM CONTACT	1 SET	C18150-R540	80u"MIN.MATTE TIN PLATING ON SOLDER AREA. GOLD PLATING ON CONTACT AREA.(SEE PART MUM)
⑤	MID PLATE	1 PCS	STAINLESS STEEL	50u" MIN. SOLDERABLE NI PLATING OVERALL.
④	BOTTOM EMC PAD	2 PCS	STAINLESS STEEL	NO PLATING
③	TOP EMC PAD	2 PCS	STAINLESS STEEL	NO PLATING
②	HOUSING	1 PCS	THERMOPLASTIC.	UL94V-0, BLACK.
①	TOP SHELL	1 PCS	STAINLESS STEEL	BLACK Ni 20u" MIN.
NO.	PART NAME.	QTY.	MATERIAL	FINISH

GENERAL TOLERANCE	DRAWN	WeiHongSu	07/20'20	SCALE	PART NO.	1UBC069*24R1R-HF
X.±0.30	checked	Ray.Lee	07/20'20	N/A	TITLE	USB TYPE C SMT,CH0.24mm
.X±0.25	APPROVED	Murray Lu	07/20'20	UNITS	mm	CUSTOMER DRAWING
.XX±0.20	File NO.	UBC06901S				
.XXX±0.10	REV.					
SHEET	1/3	Q'TY	1	A		

蘇州祥龍嘉業電子科技股份有限公司
Goldenconn Electronics Technology Co.,LTD


此文件为双方检验的唯一标准
This document is the only standard for inspection by both parties

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A	---	FIRST VERSION	07/20'20


NOTES :

1. MATERIAL :
COVER TAPE : P.S T=0.05mm
CARRIER TAPE : P.S T=0.40mm
CARTON: CORRUGATED FIBER
2. DIMENSION :
REEL : SEE DRAWING
SHIPPING BOX: 400X400X300mm
3. QUANTITY : SEE TABLE
4. PEELING RESISTANCE : 10gf~130gf (for 12~56mm)
5. PEELING SPEED : 300mm/MINUTES

PULL OUT DIRECTION

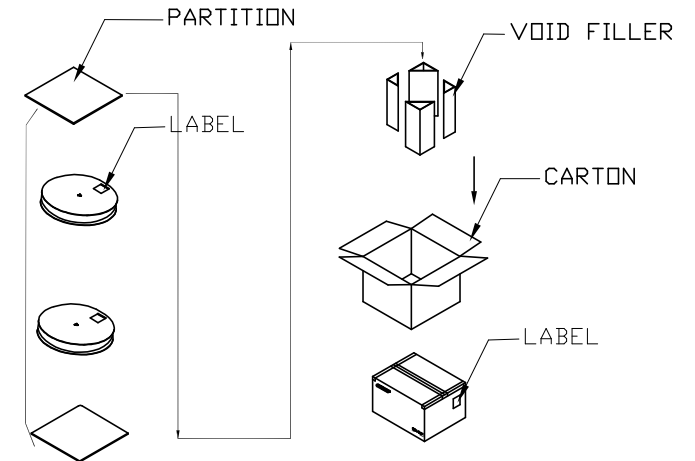

1100	9	9900
PCS/REEL	REEL/BOX	TOTAL Q'TY

GENERAL TOLERANCE		DRAWN	WeiHongSu	07/20'20	SCALE	PART NO.	1UBC069*24R1R—HF	
X.±0.40	x.'±1°	CHECKED	RayLee	07/20'20	N/A	TITLE	USB TYPE C SMT,CH0.24mm	
.X±0.30	.x'±0.1°	APPROVED	Murray Lu	07/20'20	UNITS	mm	CUSTOMER DRAWING	
.XX±0.25		File NO.	UBC06901S					
.XXX±0.10		REV.	蘇州祥龍嘉業電子科技股份有限公司 Goldenconn Electronics Technology Co.,LTD					
SHEET	3/3	Q'TY						1